SYSTEM/MODEL: TD-H/B

MODIFICATION: Change the call-in time from DE-UR to TD-H/B phones

DIFFICULTY LEVEL: 3 - Moderate - Removal or replacement of internal components.

COMPONENTS REQUIRED: 1. Capacitors: Less than or greater than 10 µfd, 16V.

INSTR/OPERATIONS: 1. Remove and replace C13, located on PC-1123 inside the DE-UR.

2. Adjust the value of the capacitor to achieve the desired length of call-in time from the door station.


- 3. For a shorter call-in time, use a $4.7 \sim 6.8 \,\mu$ fd capacitor.
- 4. For a longer call-in time, use a 15 µfd or greater capacitor.

REFERENCE DRAWING #: 1298-1061,1123-1061

Aiphone's product warranty applies to products properly modified using these instructions. However, if a unit is damaged as a result of improper modification, the warranty does not apply.

CHANGE THE CALL-IN TIME FROM THE DE-UR

DE-UR Schematic Diagram

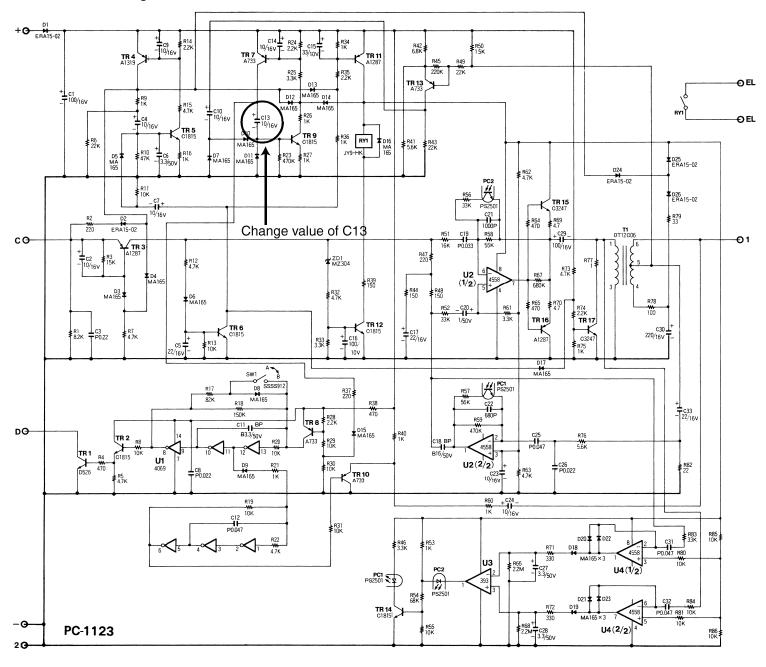

TD-H/B Mod. #1298-1061 Sch #1123-1061