

**DESCRIPTION:**

The GF-1DK is an audio only tenant station for the GF series Multi-Unit entry system. It is equipped with a handset for communication. When a visitor calls, the tenant station rings, and is answered by picking up the handset.

The GF-1DK also has the capability of calling the Concierge/Security Guard stations(s), turning on a light while speaking with a visitor at the entrance, receiving an emergency tone from a panic call station, and releasing a door.

The GF-1DK is designed to be surface mounted. Up to two GF-1DK units can be used in the same tenant location.

Communication is hands-free at the entrance station when a tenant answers the call, and the tenant will use the handset when speaking with the visitor.


FEATURES:

- Handset audio communication
- Door release to the door where communication is established
- Call to Security Guard / Concierge station
- Optional individual doorbell rings unique tone, notifying resident that someone is at their door.
- Optional activation of outside light while talking to entrance station
- Optional connection of panic call station (GFK-PS), alerting with tone and call to Concierge
- Call tone volume control
- Simple 2-conductor common bus wiring
- Surface mounts to wall on 1-gang box or ring
- ABS plastic construction

GF-1DK

Audio Only Tenant Station for GF Series

FEATURE CALL-OUTS:

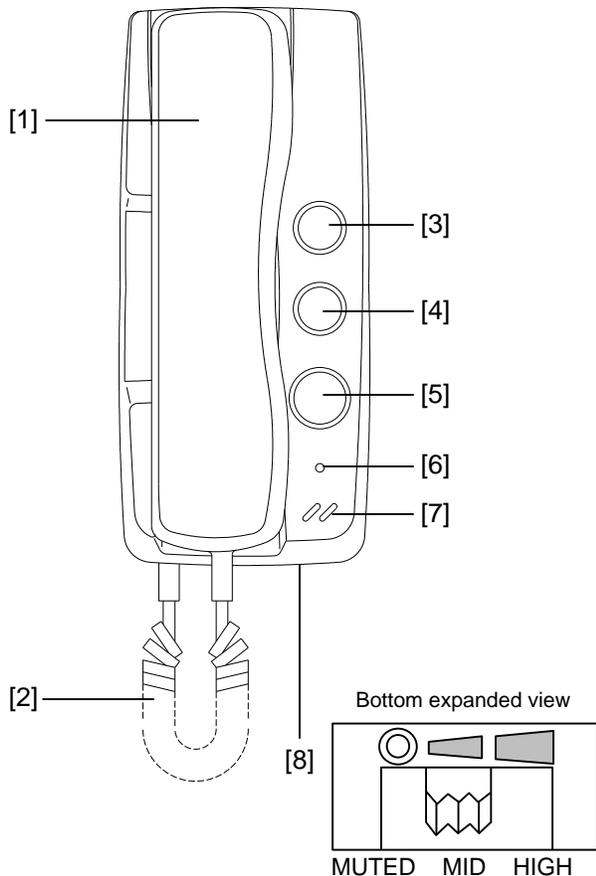

FEATURE CALL-OUT DEFINITIONS:

- [1] Handset
- [2] Coilcord
- [3] Service Button (Option)
- [4] Security Guard Call / Light Button
- [5] Door Release Button
- [6] Call tone off LED
When call tone volume control is set to the MUTED position, the LED blinks at 4.5 second intervals
- [7] Call tone Sounder
- [8] Call tone volume control (Muted, Mid, High)

SPECIFICATIONS:

- Power Source: Supplied by system
- Call: Varying ring tones from entrance panel, concierge, or doorbell
- Communication: Handset
- Capacity: Max. 2 tenant stations per resident location (no communication between)
- Wiring: 2-conductor, common bus
- Wire: Aiphone #87200250C, 2 cond. PE insulated, non-shielded, 11.05 pf/ft
- Wiring Distance: GF-BC to farthest Tenant (Audio line): 980' with 20AWG
- Talk Path: Single channel with privacy
- Operating Temp: 32 – 104° F (0 ~ 40° C)
- Dimensions (HxWxD):
7-7/8" x 3-1/2" x 2-1/2"
(200 x 89 x 63 mm)
- Weight: 0.81 lbs (370g)