

# IS-WBHA, IS-WBHE

Stainless Steel Wall Mount Box with Assistance  
or Emergency Signage and a Light Enclosure

## -INSTRUCTIONS-

The IS-WBHA wall box comes with “ASSISTANCE” in reflective blue lettering on both sides of the box. A blue beacon/strobe is mounted on top in a vandal resistant enclosure.

The IS-WBHE wall box comes with “EMERGENCY” in reflective red lettering on both sides of the box. A blue beacon/strobe is mounted on top in a vandal resistant enclosure.

The IS-WBHA, and IS-WBHE are made of 12 Gauge stainless steel and are weather/vandal resistant. The wall box narrow 4” depth allows it to meet all ADA mounting requirements. The blue beacon/strobe requires a 24V DC power source, not included. Compatible emergency / assistance sub stations include the IX-DF-2RA, IX-SS-2RA, IX-SS-RA, IS-SS-RA, IS-SS-2RA, and IS-DVF-2RA.

### IS-WBHA

Wall box with  
Light Enclosure and Blue  
Assistance Signage




### IS-WBHE

Wall box with  
Light Enclosure and Red  
Emergency Signage




**MOUNTING / WIRING:**

The IS-WBHA / IS-WBHE wall box comes pre-assembled with the beacon/strobe and the enclosure attached. Mount the box to the wall, then wire the beacon/strobe, as well as the intercom sub station. Complete installation by mounting the intercom sub station to the wall box. See below for additional information.

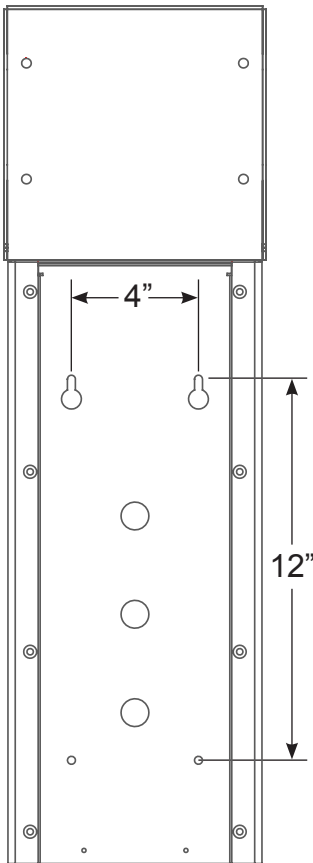

**Back View**

Secure the wall box to any flat surface using mounting hardware suitable for the surface you are mounting to. Top mounting holes are 4" apart and top to bottom mounting holes are 12" apart. There are 3 knockouts on the back and 2 underneath for routing wire.

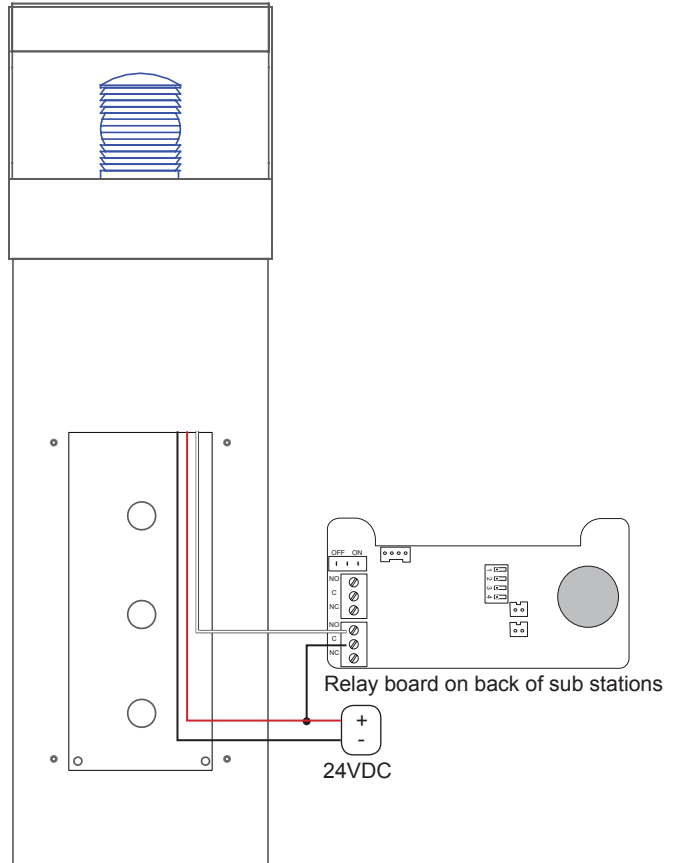

**Front View**

Connect the red and black wires from the beacon / strobe to a 24V DC power supply. Red to positive and black to negative. Connect the white trigger wire to the N/O side of relay 2 on the sub station. Connect a wire between the common of relay 2 and the positive terminal of the 24V DC power supply. See the sub station's installation manual for its complete wiring and dip switch setting options.

**SPECIFICATIONS:**

**Surface box:**

Mounting: Surface mount directly to wall  
 Material: 12 Gauge Stainless Steel  
 Color: Polished Stainless Steel  
 Dimensions: 27" H x 8" W x 4" D

**Beacon / strobe:**

Voltage: 24V DC  
 Current: 200mA  
 Wiring: Black: Ground  
 Red: +24V DC  
 White: Trigger  
 Operating Temp: -40°F to 149°F