

KCW-D/A

Video Demodulator for the KC & GF Video Systems


DESCRIPTION:

The KCW-D/A Video Demodulator provides a composite video output signal for the KC series video entry system. It can be added to the KCS-1ARD set or the KC-1GRD 1x3 system. Use it for viewing the picture from the video door entry system on a CCTV monitor or other video device. The KCW-D/A can also be used with the GF multi-unit entry system, providing composite video output whenever an entrance panel is activated.

KCW-D/A FEATURES:

- Composite (1V peak-to-peak) video signal compatible with CCTV monitor or RF modulator to tie into cable distribution system.
- Use to record video from entry system for security purposes
- Works with KC-1MRD and KC-1GRD monitors
- Works with GF System for video output from GF-VBC or GF-1MD(K).
- Video signal present when Aiphone monitor is on
- Compact design, easy to install

SYSTEM LAYOUT EXAMPLE:

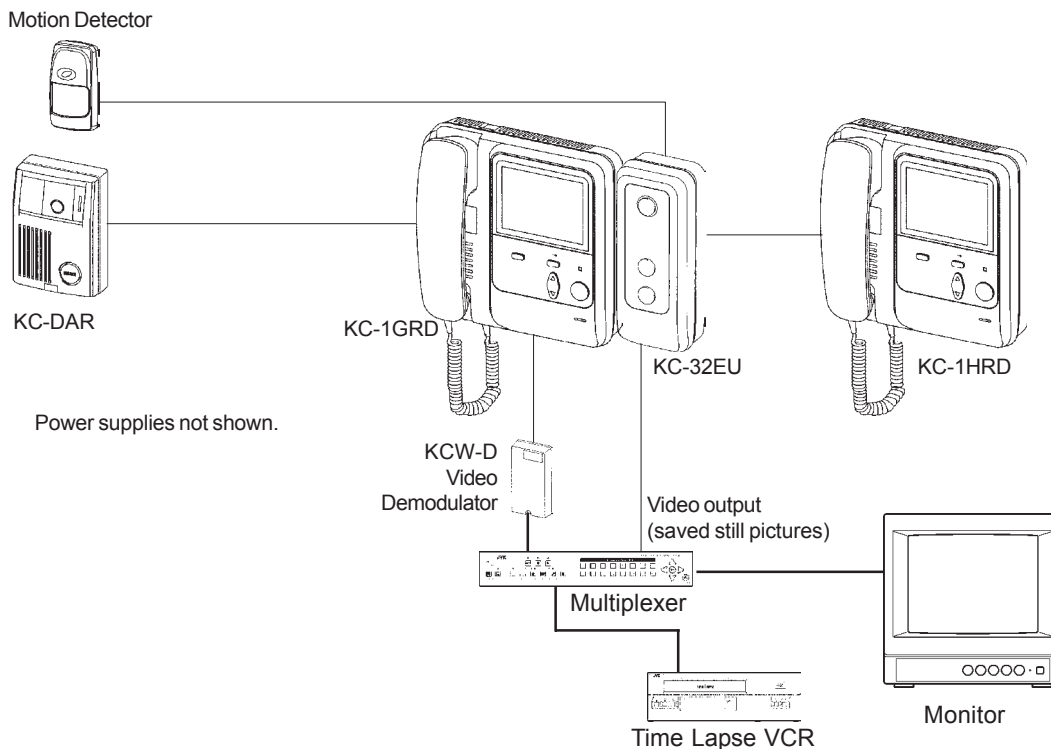

SPECIFICATIONS:

Power Source:	24V DC, supplied by PS-2420UL
Video Output:	Composite video, 1V peak-to-peak
Video Input:	Screw terminals (2). Use Aiphone #841802 from KC monitor.
Video Output:	Screw terminals (2). Use RG-59/U coax (copper core, 95% copper braid)
Video Monitoring:	30 seconds, controlled by KC-1MRD or KC-1GRD
Camera Activation:	Press MONITOR button to activate camera
Wiring Distance:	KC-1MRD or KC-1GRD to KCW-D: Max. 33'
Mounting:	Surface mount to with supplied brackets
Dimensions (H x W x D):	5-1/2" x 3" x 1-1/2"