

**DESCRIPTION:**

The JF-2MED is the master monitor for the JF series video entry security system. This system will support 2 video doors stations and 3 inside color monitor stations.

The JF-2MED has a built in picture memory feature that can be set to record automatically when the visitor calls, or the record can be done manually by the user. Up to 50 images can be recorded at a rate of 1 frame per second and 8 frames per image (400 total frames). Up to 10 images (80 frames) can be saved and protected from automatic overwriting.

The voice memo feature allows the user to record a short message for someone or a reminder for themselves. Up to 3 voice memos for internal use can be recorded, up to 15 seconds per memo.

An outgoing message can be pre-recorded to be sent to the door station for instances when you can't, or don't want to use your voice to answer a visitor. Up to two pre-recorded messages can be saved. These can be played after identifying a visitor and must be manually selected by the user. This is not an automatic message sent when the visitor calls.


FEATURES:

- Hands free audio communication
- Door release to the door where communication is established (using RY-3DL)
- All Call between inside monitors
- Internal Picture Memory
- Internal voice memo and outgoing message can be recorded for playback
- Select from 5 different display languages (English, French, German, Spanish or Dutch)
- External Sensor Input
- Simple 2-conductor wiring
- Surface mounts to wall on 1-gang box or ring
- ABS plastic construction

JF-2MED

Master Monitor Station for JF Series

FEATURE CALL-OUTS:

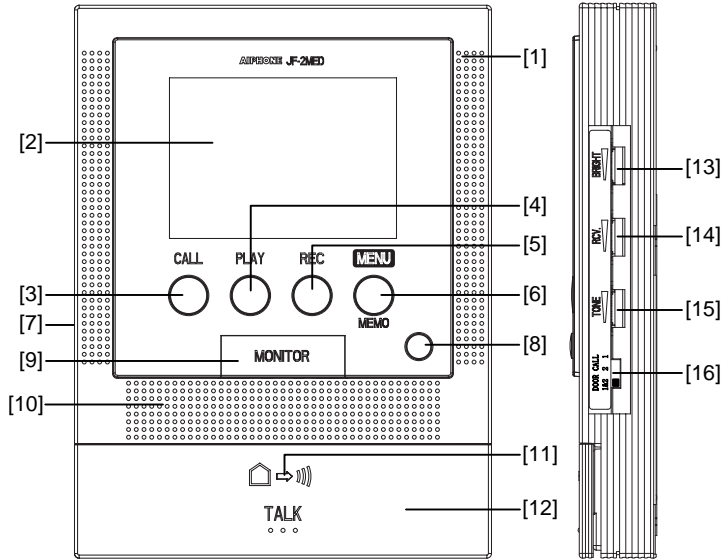

JF-2MED on MCW-S/A desk stand:

Shown at 60° angle



FEATURE CALL-OUT DEFINITIONS:

- [1] Microphone
- [2] Color LCD video monitor (3-1/2")
- [3] CALL button, door call-in LED (red)
- [4] PLAY button, play LED (red)
- [5] RECORD button, record LED (red)
- [6] MENU/MEMO button, Memo LED (red)
- [7] Power switch
- [8] Option button
- [9] MONITOR button
- [10] Speaker
- [11] Transmit LED (red)
- [12] TALK button
- [13] Screen brightness control
- [14] Receive volume control (high to off)
- [15] Chime tone, alert sound volume (high to off)
- [16] Call-in setting switch
 - "1": Call-in from door station 1 only
 - "2": Call-in from door station 2 only
 - "1&2": Call-in from both door stations 1 & 2

SPECIFICATIONS:

- Power Source: 18VDC, PS-1820UL
- Call: Varying ring tones from doors based on how set in the Menu
- Communication: Hands-free (VOX) after TALK button is pressed once, or push-to-talk
- Capacity: 2 doors, 3 monitors
- Wiring: 2-conductor, PE insulation, Aiphone wire #871802 from doors & #871804 between monitors
- Wiring Distance: Door to master, 330'
Master to farthest sub, 330'
- Talk Path: Single channel
- Operating Temp: 32 – 104° F (0 ~ 40° C)
- Dimensions (HxWxD): 7" x 5-5/16" x 1-1/4"
(179 x 135 x 32 mm)
- Weight: 1.1 lbs (500g)