

**NEM Lamp Memory System**


**WEATHER RESISTANT SUB STATIONS**

**NE-DA / NE-JA**


**FEATURES/FUNCTIONS:**

- \* Weather resistant intercom sub stations in surface or flush mount styles.
- \* Compact size for easy installation and operation.
- \* Equipped with extra contact capability (requires RY-PA) to activate a remote device at the sub location from the time the call is placed until it is answered.
- \* Corridor lamp (NBY-4A) can be included at each sub station location.
- \* Flush mount model (NE-JA) fits into standard 2-gang box.


**NE-DA**

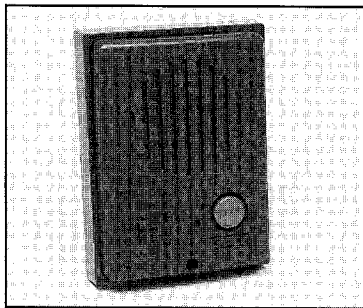

**NE-JA**

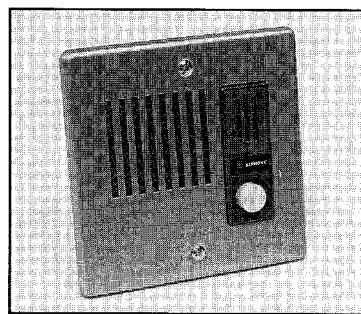

**SYSTEM LAYOUT EXAMPLE:**

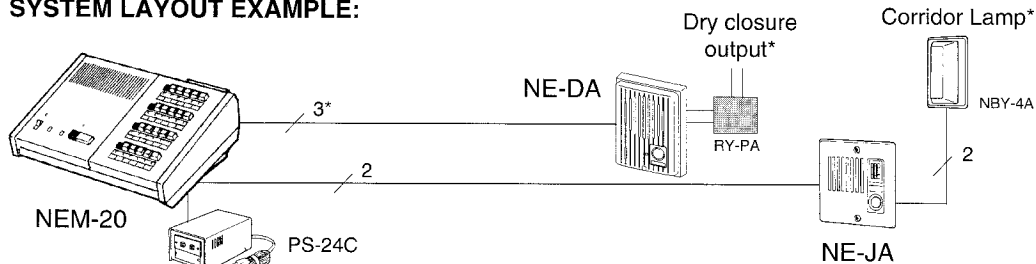

\* Either one or both features can be added to either sub station.

**SPECIFICATIONS:**

- Power Source: Supplied by master.  
 Communication: Hands free at remote station.  
 Wiring Distance: 420' with 22 AWG, 1000' with 18 AWG.  
 Wiring: 2 conductors home run to the NEM master, or 1 common wire plus 1 individual wire per sub, looped.  
 \*With extra contact at sub: 2 common plus 1 individual wire per sub.  
 2 wires from sub to corridor lamp.  
 Wire: Use Aiphone #822202 or #821802 2-cond., or #8222xx series multi-cond. wire.  
 Dimensions (H x W x D): NE-DA: 5" x 4" x 1". NE-JA: 4-1/2" x 4-9/16" x 1/2"

For more information on these and other Special Order Products, please call the Technical Support department.

Aiphone Corporation  
 1700 130th Ave. N.E.  
 Bellevue, WA 98005  
 (206) 455-0510  
 FAX: (206) 455-0071

Communication systems for business, home and industry.

**TOLL FREE TECHNICAL DEPARTMENT**  
**FAX LINE: (800) 832-3765**