



MarketCom Series


Communication and Paging System



Grocery Stores | Retail Outlets | Industrial Facilities


Features and Benefits

- **60 station capacity**
Communicate with employees throughout the entire facility
- **Paging and announcements**
Request personnel to answer a specific channel or broadcast a general message
- **4 communication channels**
Reach employees instantly without having to wait for occupied lines to open up
- **Color LED indicators**
Know exactly which channel to answer by the corresponding LED indicator
- **Handset page button**
Prevent accidental paging with the strategic location of the page button
- **Simple to use**
Push one button to page and one button to answer - easier than a telephone!
- **Complements phone system**
Improve communication with quick access paging, a feature telephones do not offer
- **Great for noisy environments**
Use the paging feature to produce loud and clear announcements in any environment
- **Reliable and designed to last**
Install the system and have guaranteed trouble-free use for years to come!

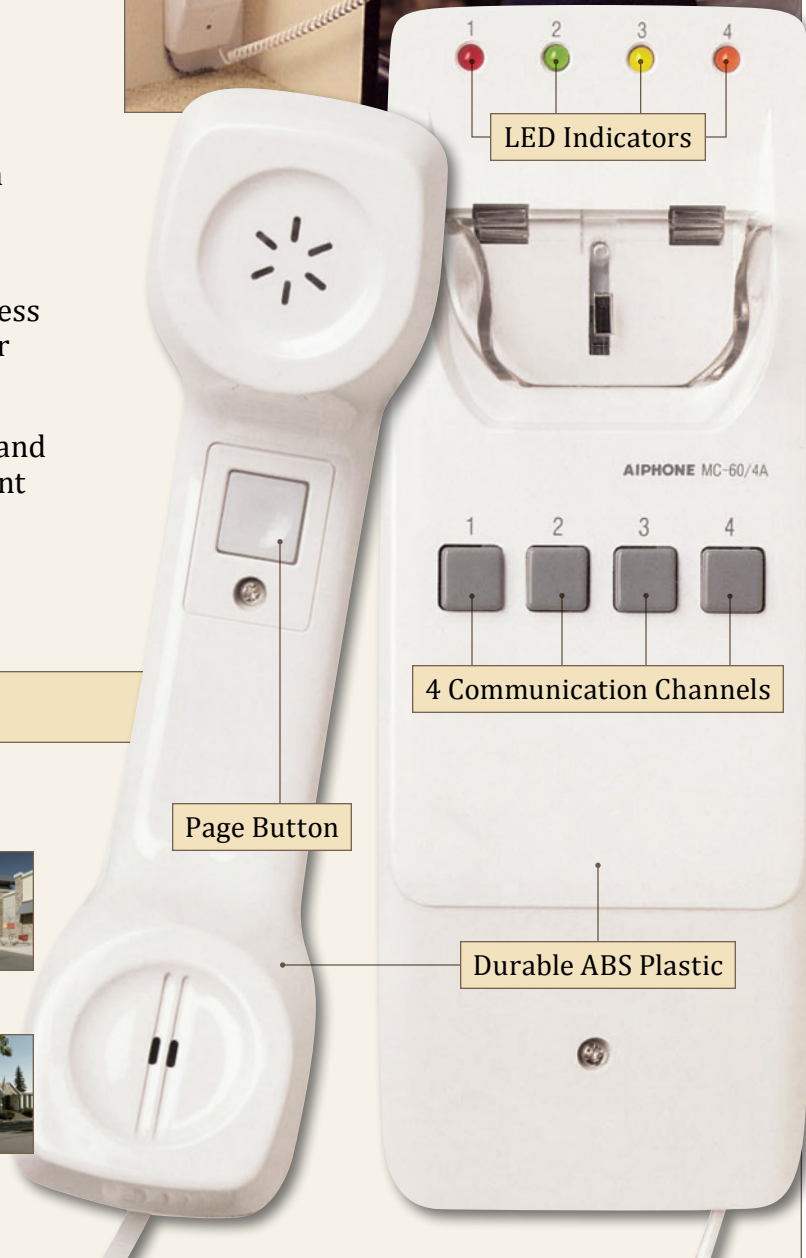

Ideal Applications

Grocery Stores



Retail Outlets



Industrial Facilities



Manufacturing Plants



Warehouses



Components

Intercom Master Stations

Install up to 60 total devices



MC-60/4A (white)
MarketCom Master
Station for Wall Mounting
9-1/4" H 3-1/2" W 3-1/2" D

- 4 communication channels
- Color-differentiated LED indicators (red, green, yellow, and orange)
- Easy access paging button located on the underside of the handset.



MC-60/4B (beige)
MarketCom Master Station
for Tabletops and Desktops
4" H 8-7/8" W 7-1/2" D



MC-S23
Optional 23"
Checkstand
Pedestal for
MC-60/4A



MC-S12
Optional 12"
Checkstand
Pedestal for
MC-60/4A

Paging Adaptor & Power Supply

Install 1 device per system



MC-A/A
Zone Paging Adaptor
2" H 3-5/8" W 5-5/8" D




PS-2420UL
24V DC, 2A Power Supply
6-9/16" H 3-9/16" W 2" D

Paging Speakers

Install number of speakers needed
(based on amplifier wattage)



SP-2570N
Flush Mount Ceiling
Speaker for Indoor Use
8Ω, 25/70V, 4W
Diameter: 12-7/8"
Baffle Diameter: 8"



SSB-2
Ceiling Support
Bracket for SP-2570N



AH-16TN
Surface Mount
Horn Speaker
for Indoor or
Outdoor Use
8Ω, 25/70V, 16W
Bell Diameter: 8-1/4"
Depth: 9"



AH-32TN
Surface Mount
Horn Speaker
for Indoor or
Outdoor Use
25/70V, 32W
Bell Diameter: 8-1/4"
Depth: 9"

Paging Amplifiers

Install 1 device per system



DMA2120
120W Paging Amplifier
4" H 10-3/4" W 11" D



DMA2060
60W Paging Amplifier
4" H 10-3/4" W 11" D



T3130BGM
30W Paging Amplifier
3-1/2" H 10-1/2" W 9-1/2" D



T3115BGM
15W Paging Amplifier
3-1/2" H 10-1/2" W 9-1/2" D

Specifications

Power Source	24V DC - use PS-2420UL
Consumption	Max. 70mA (in paging mode)
Communication	Push page button (located on underside of handset) to broadcast page throughout all connected speakers. Select a communication channel (1-red, 2-green, 3-yellow, or 4-orange) to indicate which channel the receiver needs to pick up. Receiver pushes button corresponding with the lit LED to open two-way communication. Up to three stations can communicate on one channel.
Station Capacity	Max. 60 stations with 6 wiring blocks (up to 10 master stations per wiring block)
Wiring	7 conductor, non-twisted, low capacitance (PE insulation) - use Aiphone wire #852207
Wiring Distance	MC-A/A to farthest MC-60/4A or MC-60/4B on block: 1,700' (22AWG) or 4,000' (18AWG) Total cumulative wiring between MC-A/A and MC-60/4A or MC-60/4B: 5,000' (22AWG)

LOCAL AIPHONE EXPERTS ARE HERE TO HELP.
CONTACT US TODAY!



MarketCom
(MC Series)
Brochure
05/2013



ISO-14001 Certified



Aiphone Co. Ltd.

ISO 9001:2008 Certified



Aiphone Corp.

Deming Prize



Aiphone Co. Ltd.