

This operation guide describes the basic functions of your IX Series Master Station

For a complete operation manual (35.1 MB), scan QR code to download it from the manufacturer's website: www.aiphone.com/ix-op-man



AIPHONE®



IX-MV Master Station

Operation Buttons



Push and hold the **PRIVACY** Button to mute the microphone when **AUTO ANSWER** is off (the caller can still be heard through the speaker). When **AUTO ANSWER** is on, privacy will mute the microphone until the **TALK** Button is pushed or the Handset is lifted.



Push the **TRANSFER** Button to manually send an answered call to another master station within the address book (an orange LED on the button blinks when transferring).

To automatically send incoming calls to another master station within the address book (**ABSENT TRANSFER**), use the **SETTING** Button to program a set destination. Once programmed, push the **TRANSFER** Button to toggle this feature on or off (an orange LED on the button remains lit when the feature is activated).




Push the **LIST** Button to view stations and groups within the address book.

Use the **Cursor Control** and **Enter** Buttons to make selections.



Push the **SETTING** Button to view all setting options for your specific master station. Use the **Cursor Control** and **Enter** Buttons to make selections. A status icon appears on screen when a function is in operation (see chart below).

Icon	Status
	Communication in progress (G=Normal Y=Priority R=Urgent)
	Incoming/Outgoing call in progress (G=Normal Y=Priority R=Urgent)
	Receiving calls in queue (002=2 stations calling)
	Incoming/Outgoing page in progress (G=Normal R=Urgent)
	Microphone on (PRIVACY mode off)
	Microphone off (PRIVACY mode on)
	On-hold, call transferring
	Monitoring in progress
	Door release activated (unlocking)
	Settings screen is displayed
	Screen adjustment in progress
	Search in progress
	An error has occurred
	Processing selected function

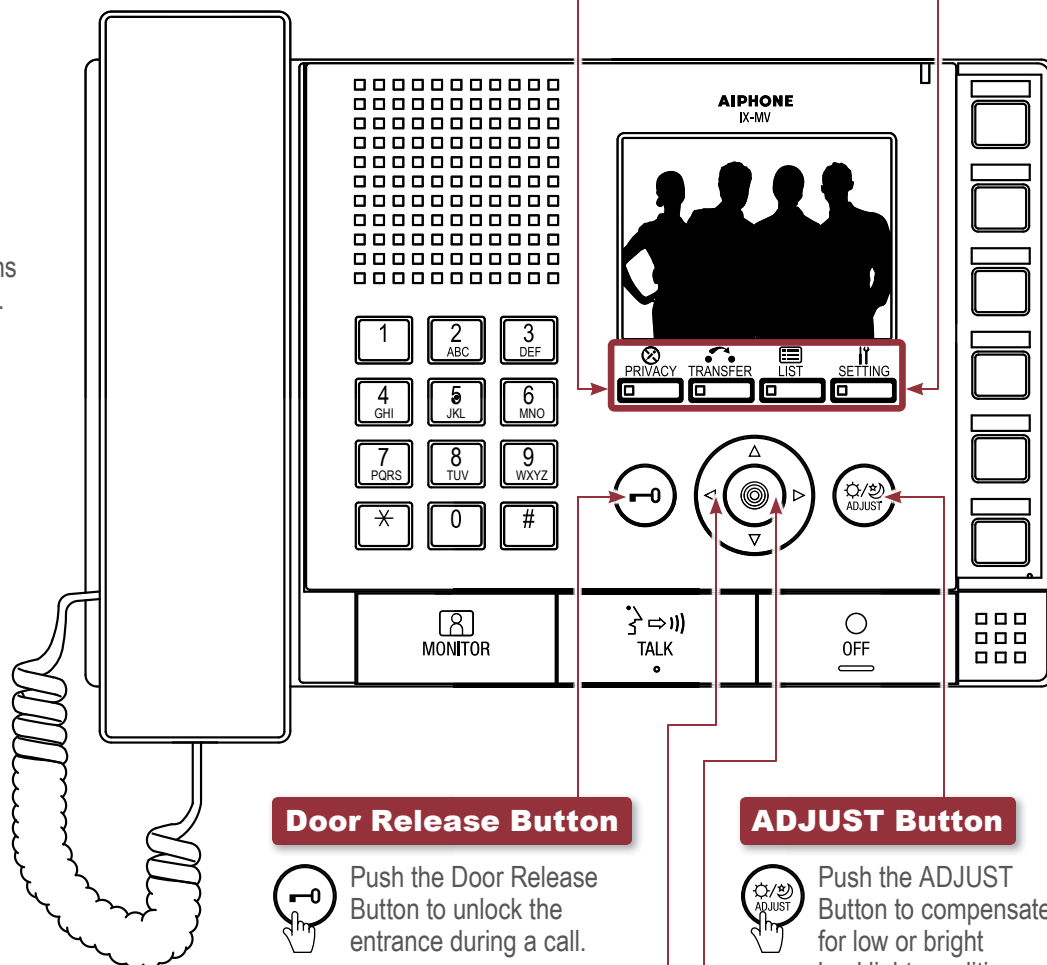

Door Release Button



Push the **Door Release** Button to unlock the entrance during a call.

ADJUST Button



Push the **ADJUST** Button to compensate for low or bright backlight conditions when viewing video from a door station.

Cursor Control Button



Push **Δ**, **∇**, **◀**, or **▶** to control the cursor when making menu selections.

Enter Button



Push the **Enter** Button to make a menu selection.

This operation guide describes the basic functions of your IX Series Master Station

For a complete operation manual (35.1 MB), scan QR code to download it from the manufacturer's website: www.aiphone.com/ix-op-man




AIPHONE®




IX-MV Master Station

Cursor Control and Enter Buttons



See "IX-MV Master Station Operation Guide | 1 of 2" to read how the Cursor Control and Enter Buttons operate.

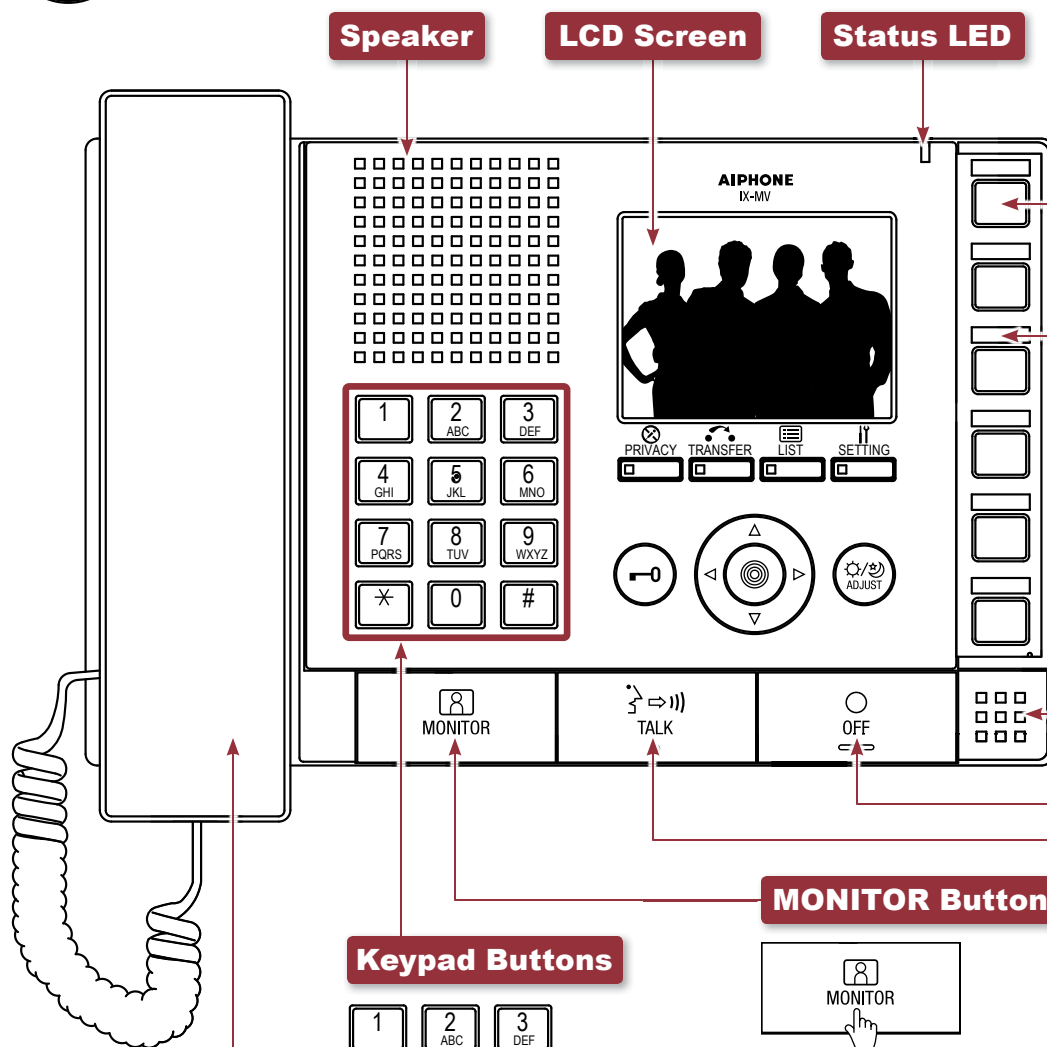

Speed Dial Buttons




Push a Speed Dial Button to call or page the station or group programmed for each corresponding button. To program speed dial options and their priority levels, use the SETTING Button.

Name Card and Cover

When a station or group is programmed for a speed dial function, fill out the name card with the corresponding name or number and place it under the transparent cover for quick reference.

Microphone

OFF Button



Push the OFF Button to end a call (this does not turn off the device). If in MONITOR mode, push the OFF Button to stop monitoring. If receiving a page, push the OFF Button to stop the page from going to your specific master station.

TALK Button



Push the TALK Button to answer an incoming call or respond to an incoming page*. Once answered, the conversation becomes hands-free. To make a call, search for the station or group using the Keypad Buttons or the LIST Button. Once selected, push the TALK Button to establish the call.

Handset


Pick up the Handset to answer an incoming call or respond to an incoming page*. Hang up the Handset to end the conversation. To make a call, search for the station or group using the Keypad Buttons or the LIST Button. Once selected, pick up the Handset to establish the call.

Keypad Buttons



Use the Keypad Buttons to search for a station or group by number. To search by name, push the LIST Button and use the Cursor Control and Enter Buttons to select a search option. Once selected, use the Keypad Buttons to type the name of the station or group.

MONITOR Button



Push the LIST Button and use the Cursor Control and Enter Buttons to select a desired station. Once selected, push the MONITOR Button to begin monitoring activity where the station is located.

**Lifting the Handset or pushing the TALK Button during a paging announcement will cancel/stop the page throughout the system. This includes any emergency paging notifications or alerts.*