

SYSTEM/MODEL: MP-S

MODIFICATION: Dual master system with one remote speaker (MP-1S)

DIFFICULTY LEVEL: 2 - Easy/moderate - Component connection to external points.

COMPONENTS REQUIRED: 1. DAK-2S: Dual master adapter kit
2. PS-1225: 12V DC power supply, one per master

INSTR/OPERATIONS: 1. Install components as shown on the following diagram.

2. Only one master can be used at a time. If two masters have the press the TALK button at the same time, a loud feedback tone will be heard. The second master must press OFF to prevent this from occurring.


3. Sub station will call both masters simultaneously and either master can answer the call.

REFERENCE DRAWING #: 1198-501

Aiphone's product warranty applies to products properly modified using these instructions. However, if a unit is damaged as a result of improper modification, the warranty does not apply.

MODIFICATION DIAGRAM

DUAL MASTER MP-1S SYSTEM

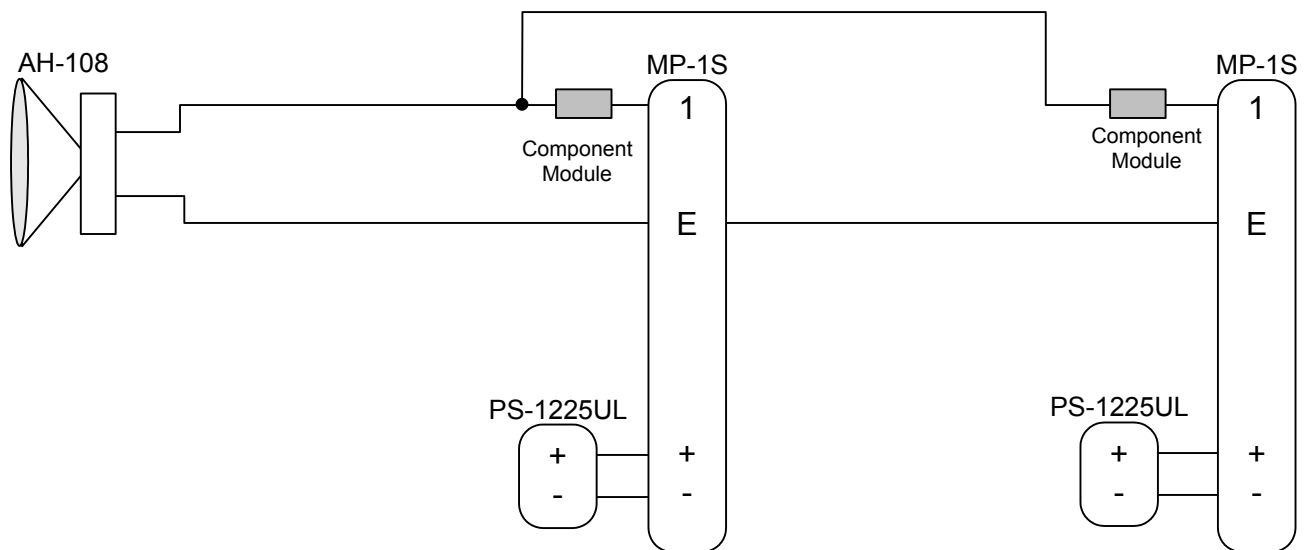

NOTES:

1. Install the bare wire end of the DAK-2S component modules to "1" terminal of the MP-1S masters.
2. Only one master can be used at a time.
3. Each master **MUST** have its own power supply. Otherwise, ground loop feedback will occur when either master station is on.