

DESCRIPTION:

The IS-SS-CI is a stainless steel flush mount audio door station, equipped with a CCTV camera input for integration of a separate camera (Analog NTSC 1Vpp) for viewing the area where the unit is located.


The call button will trigger two selectable relay outputs for activation of external systems or devices. The associated camera will come on when a call is placed from the unit, or when called by the master station. A call status indicator will light when the station is in communication with a master station.

The unit is made of stainless steel and includes tamper resistant screws.

The IS-SS-CI is compatible with the IS series communication system. Wiring is CAT-5e or CAT-6 to the designated exchange unit (IS-CCU, IS-SCU).

FEATURES:

- Audio communication between master station and calling area
- CCTV input for integration of video camera
- Standard call button
- Two selectable relay outputs
- LED call status indicator
- Stainless Steel faceplate with tamper resistant screws

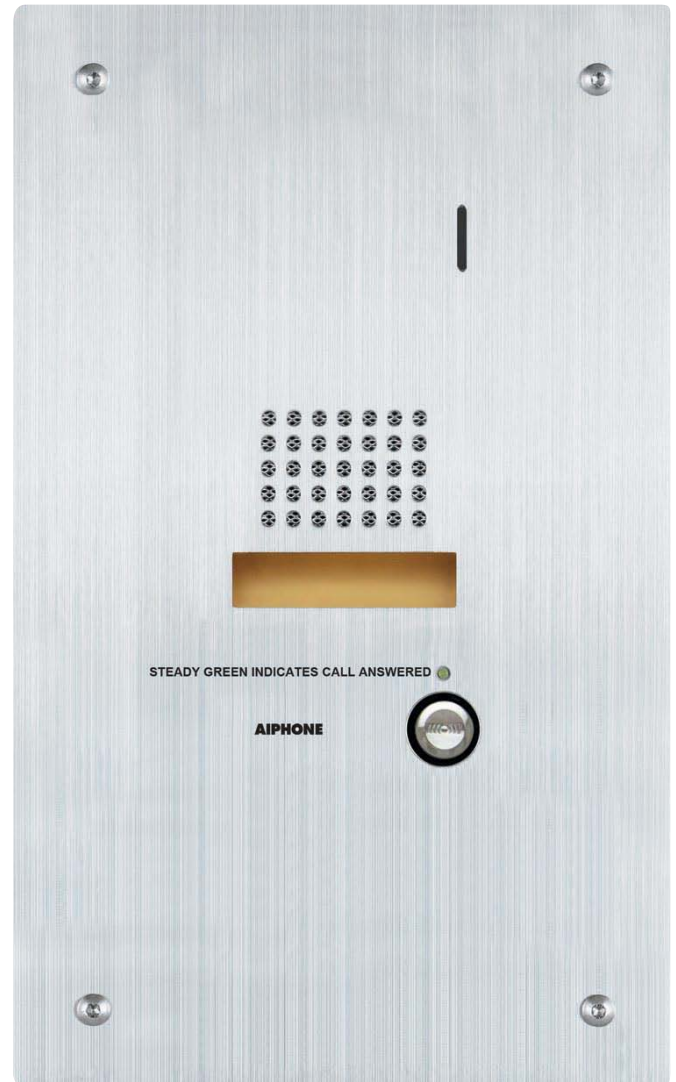

IS-SS-CI

Stainless Steel Flush Mount Audio Door Station with Camera Input

FEATURE CALL-OUT DEFINITIONS:

- [1] Microphone
- [2] Speaker
- [3] Directory card
- [4] Call status indicator
- [5] Call button

SPECIFICATIONS:

- Power Source: 48VDC (supplied from CEU)
- Communication: Open voice hands-free
- Wiring: CAT-5e or CAT-6
- Wiring distance: 980'
- Camera Input: Analog NTSC 1Vpp
- Door release: 24V AC/DC, 500mA (N/O, COM, N/C)
- Operation Temp: 14° - 140°F (-10° - 60°C)
- Dimensions: 7" W x 11-3/4" H x 1-7/8" D

FEATURE CALL-OUTS:

