


SPECIFICATIONS

KA-DGR PANEL

Stainless Steel Housing for Color Video Door Stations



KA-DGR PANEL FEATURES:

- Vandal resistant faceplate
- Weather resistant for outdoor use

K-SERIES DOOR STATION FEATURES:

- Push button to call inside station(s)
- Compact surface mount design
- Cameras mount to 1-gang box or ring
- Tilt color camera
- Call button rings chime at inside monitor
- Audio and video activate with door call-in
- Hands free communication when master answers
- Built-in illumination for low light applications
- External light with automatic activation can be added
- Simple 2-wire hook up can replace existing doorbell

SPECIFICATIONS:

System:

Color:

Power Source:

Communication:

Wiring Distance:

Dimensions:


Camera Unit:

KA, KB and KC series 24V DC - Supplied by monitor 14° ~ 140° F Operating Tempature: Hands free 1/4" Color CCD (Charged Coupled Device) with DSP (Digital Signal Processor) 31" V x 22" H at 20" Image Viewing Area: 165' w/22AWG; 330' w/18AWG Faceplate Material: Stainless Steel Polished Stainless Steel Camera Mounting: Surface mount Camera Backbox: 1-Gang box or ring 5-1/2" x 4-1/8" x 1-5/8"

DESCRIPTION:

The KA-DGR PANEL is a stainless steel housing for Aiphone K-series video system. All K-series cameras feature a color CCD camera with built-in illumination for low light viewing.

A call button on the Color Video Door Station activates an internal monitor(s) with a four stroke chime. Communication at the door is hands free.

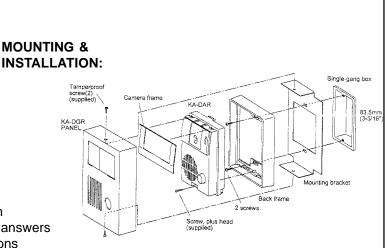

Aiphone Communication Systems • 1700 130th Ave. NE • Bellevue, WA 98005 (425) 455-0510 • FAX: (425) 455-0071 • (800) 692-0200 • http://www.aiphone.com