


APPLICATION DIAGRAM

# AX with Viking K-1900-5 and RC-2A for CO Line Transfer and Door Release (1 door)

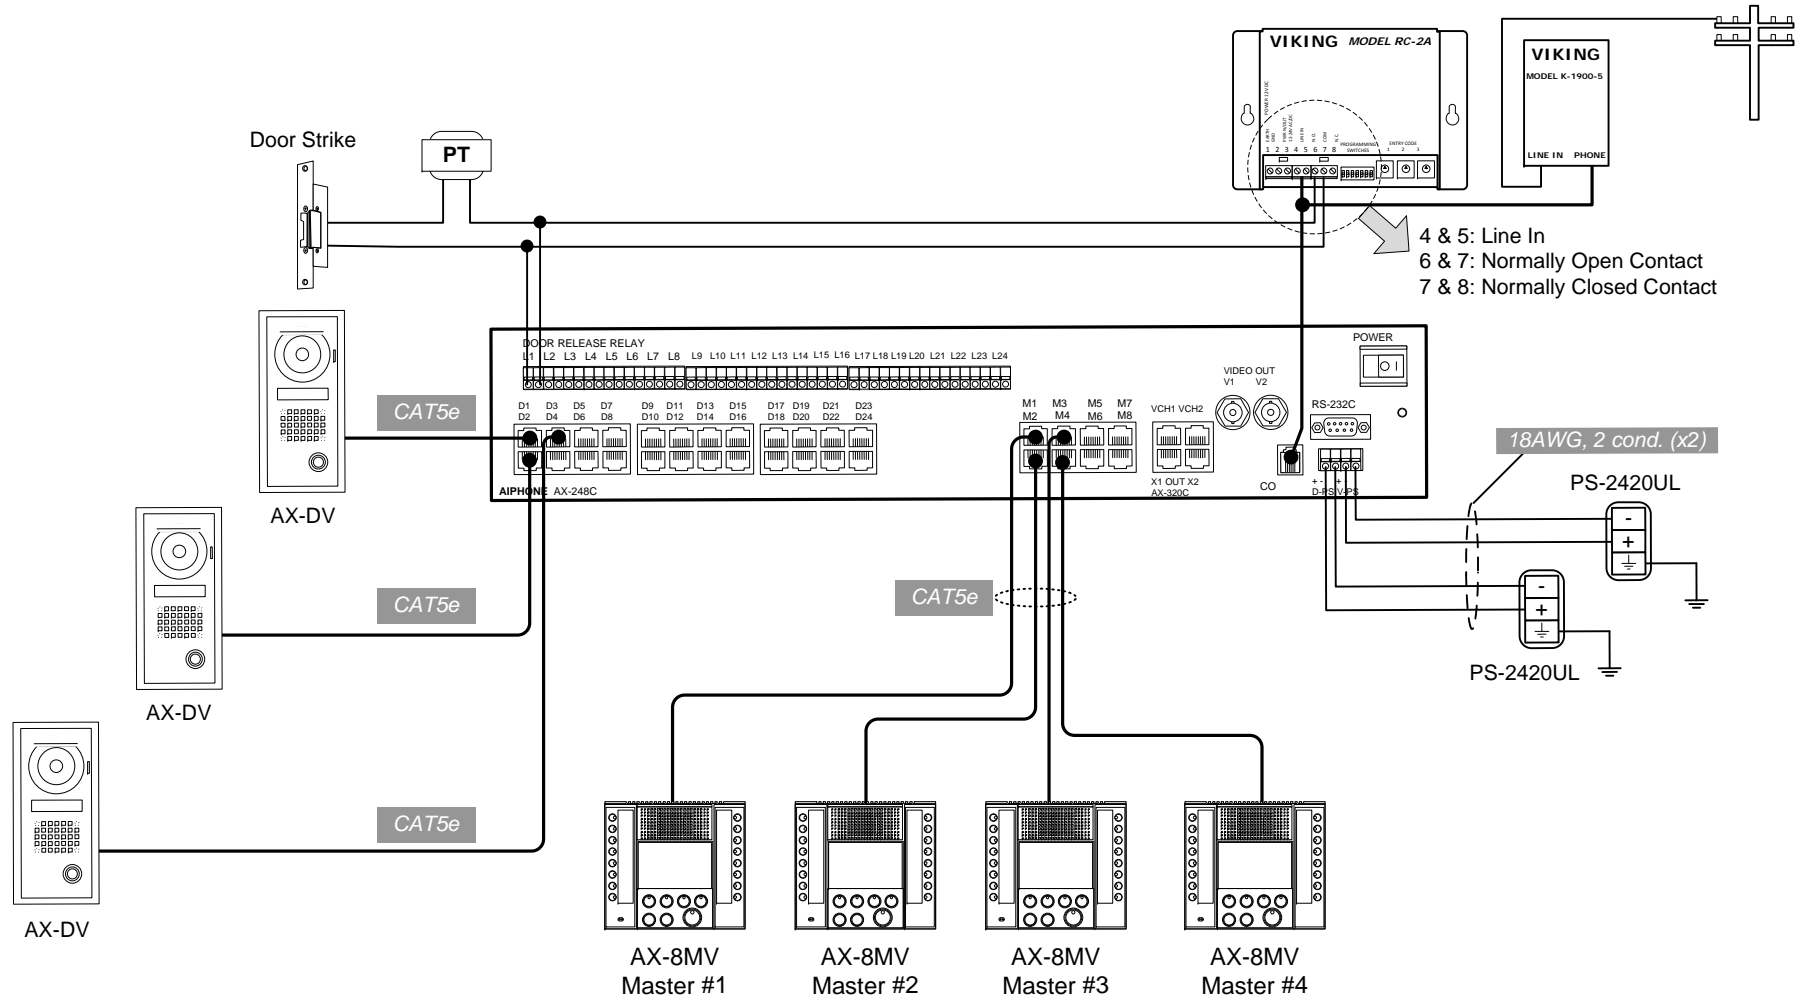

**NOTES:**

1. The Viking K-1900-5 is used for the CO Line Transfer mode, transferring a door station call to a programmed telephone number. With communication established on the phone line, the Viking RC-2A allows the telephone to trigger a single door release contact.
2. When programming the K-1900-5, depress \*02 after the access code to allow use of the RC-2A. The default access code for the K-1900-5 is 845464 (V-I-K-I-N-G).
3. The RC-2A will only provide one door release contact. For multiple contacts, up to three Viking RC-3 adaptors can be used for three contacts each, for a total of nine selective contacts.
4. Refer to the Instructions included with the Viking equipment for complete installation information.

Max. distance from each door station to AX CEU = 980 feet with CAT-5e.  
 Max. distance from each master station to AX exchange = 980 feet with CAT-5e.