

SP-2570N

Flush Mount Ceiling Speaker

DESCRIPTION:

The SP-2570N is a ceiling speaker used for paging and background music. It is equipped with a 25/70V transformer with five wattage taps up to 5W. The speaker is mounted to a round steel baffle, finished with a white powder-coated epoxy. An optional ceiling support bridge (SSB-2) is available for installations in drop tile ceilings.


Designed for indoor use only.

SP-2570N**FEATURES:**

- 8" dual cone speaker, 8 ohms
- 25 or 70V transformer
- Five wattage taps from 1/3W to 5W
- Round white steel baffle
- Excellent sound reproduction for music and paging

SSB-2

Mounting bracket for drop tile ceiling

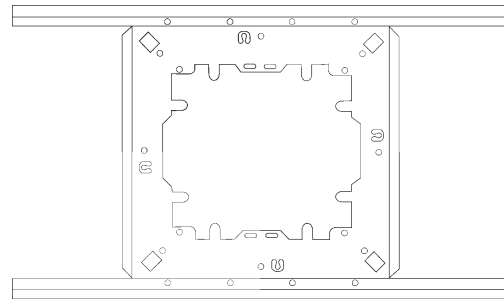**TRANSFORMER WATTAGE TAPS:****70.7V LINE**

Com: Black
5W: Green
2.5W: White
1.25W Blue
.625W Gray
.312W Violet

25V LINE

Com: Black
5W: Brown
2.5W: Red
1.25W: Orange
.625W: Green
.325W: White

Secondary (Speaker direct): 8 Ohms

SPEAKER SPECIFICATIONS:


Size: 8"
Magnet Weight: 5 oz.
Magnet Material: Ceramic
Voice Coil Impedance: 8Ω
DC Resistance, ohms: 7.4Ω
Voice Coil Diameter: 3/4"
Power Handling: 8W RMS
Frequency Response: 65 to 17K Hz.
Depth: 2-3/4"
Weight: 1.75 lbs.
Cone: Dual

BAFFLE SPECIFICATIONS:

Type: One-step contour
Baffle Diameter: 12-7/8"
Material: 22 gauge steel zincrometal
Finish: White semi-gloss powdered epoxy
Depth Projection: 3/8" from surface
Weight: 1.5 lbs.

SP-2570N-SS 0814

SP-2570N - 8 OHM TAP

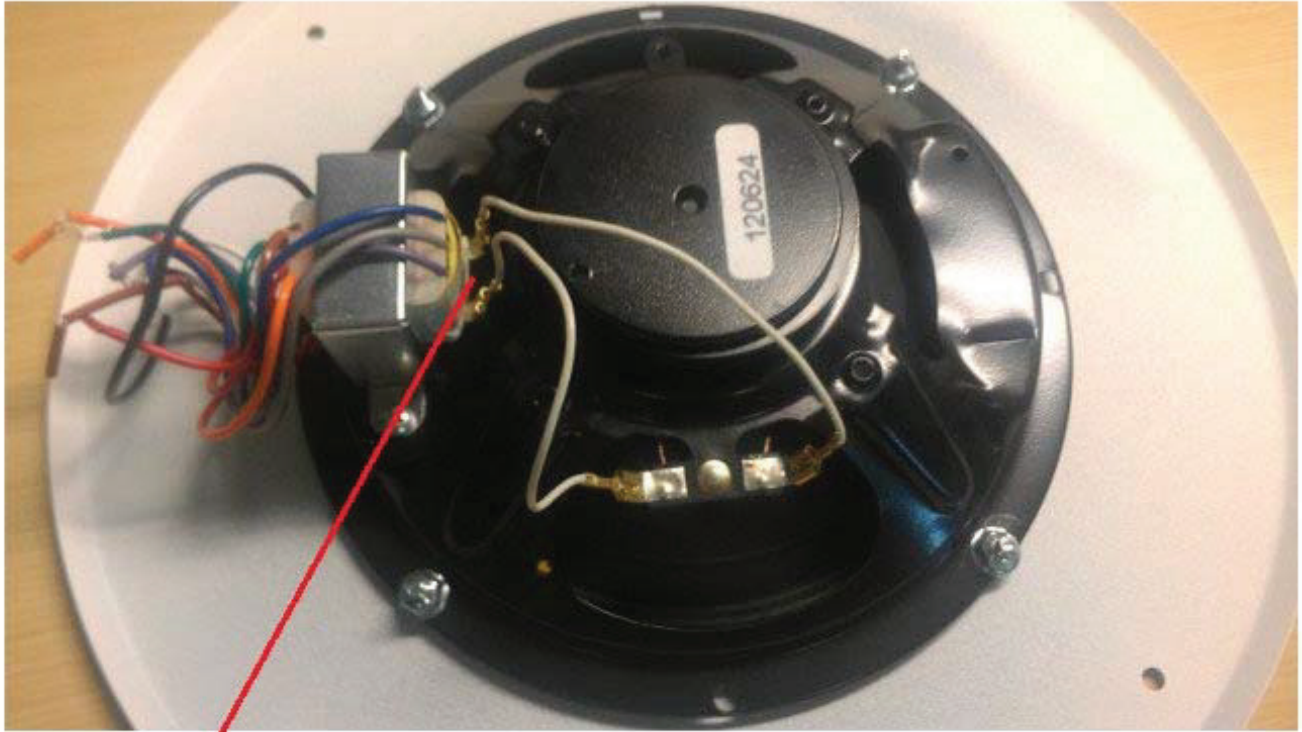

REMOVE HERE

CONNECT AUDIO SOURCE HERE

